



US010065242B1

(12) **United States Patent**  
**Al-Ahmari et al.**

(10) **Patent No.:** **US 10,065,242 B1**  
(45) **Date of Patent:** **Sep. 4, 2018**

(54) **ADJUSTABLE BUILD ENVELOPE FOR  
POWDER BED FUSION MACHINES**

(56) **References Cited**

U.S. PATENT DOCUMENTS

(71) Applicant: **KING SAUD UNIVERSITY**, Riyadh  
(SA)

4,815,482 A	3/1989	Clift et al.	
6,684,917 B2	2/2004	Zhu et al.	
9,149,870 B2 *	10/2015	Minick	B22F 3/1055
2004/0104149 A1	6/2004	Lomas et al.	
2007/0126157 A1 *	6/2007	Bredt	B33Y 40/00
			264/334
2011/0252618 A1 *	10/2011	Diekmann	B29C 67/0077
			29/401.1
2014/0302187 A1 *	10/2014	Pawlikowski	B29C 67/0085
			425/174.4
2016/0228991 A1 *	8/2016	Ryan	B23K 26/342

(72) Inventors: **Abdulrahman M. Al-Ahmari**, Riyadh  
(SA); **Abdullah Yahia M. Alfaify**,  
Riyadh (SA); **Mohamed Hamid**  
**Hamid**, Riyadh (SA)

(73) Assignee: **KING SAUD UNIVERSITY**, Riyadh  
(SA)

FOREIGN PATENT DOCUMENTS

(\*) Notice: Subject to any disclaimer, the term of this  
patent is extended or adjusted under 35  
U.S.C. 154(b) by 0 days.

DE	19528577 A1	2/1997
WO	2017041931 A1	3/2017

\* cited by examiner

(21) Appl. No.: **15/909,933**

(22) Filed: **Mar. 1, 2018**

*Primary Examiner* — Alison L Hindenlang

*Assistant Examiner* — Nicholas R Krasnow

(74) *Attorney, Agent, or Firm* — Richard C. Litman

(51) **Int. Cl.**

**B22F 3/105** (2006.01)

**B01J 8/18** (2006.01)

**B01J 8/38** (2006.01)

**B22F 3/11** (2006.01)

**B33Y 40/00** (2015.01)

**B33Y 30/00** (2015.01)

(52) **U.S. Cl.**

CPC ..... **B22F 3/1055** (2013.01); **B01J 8/1872**  
(2013.01); **B01J 8/382** (2013.01); **B22F**  
**3/1121** (2013.01); **B22F 2003/1056** (2013.01);  
**B33Y 30/00** (2014.12); **B33Y 40/00** (2014.12)

(58) **Field of Classification Search**


CPC ..... **B22F 3/1055**; **B01J 8/1872**


See application file for complete search history.

(57) **ABSTRACT**


The adjustable build envelope for powder bed fusion machines includes a frame in the build chamber having four movable sides, a base and two motors with lead screws. The motors are placed at an angle of 45° with respect to the side of the frame, so that as the motors rotate the lead screws, the two sides of the frame slide in opposite directions. The sides move inward with the help of guide pins and dovetail grooves, thereby reducing the build envelope volume. For large builds, both motors rotate in the reverse direction to increase the build envelope volume. By changing the build envelope volume according to the given build size, powder waste is reduced.

**2 Claims, 3 Drawing Sheets**

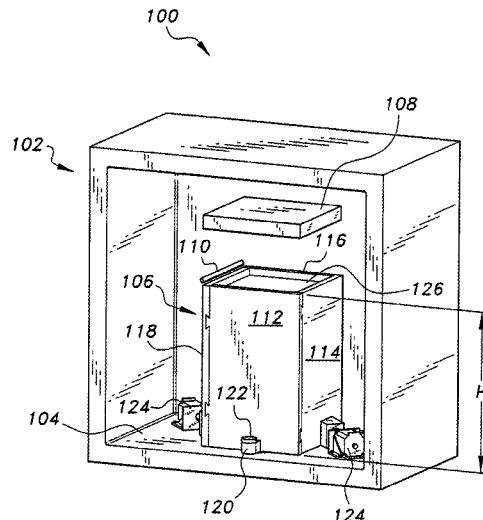


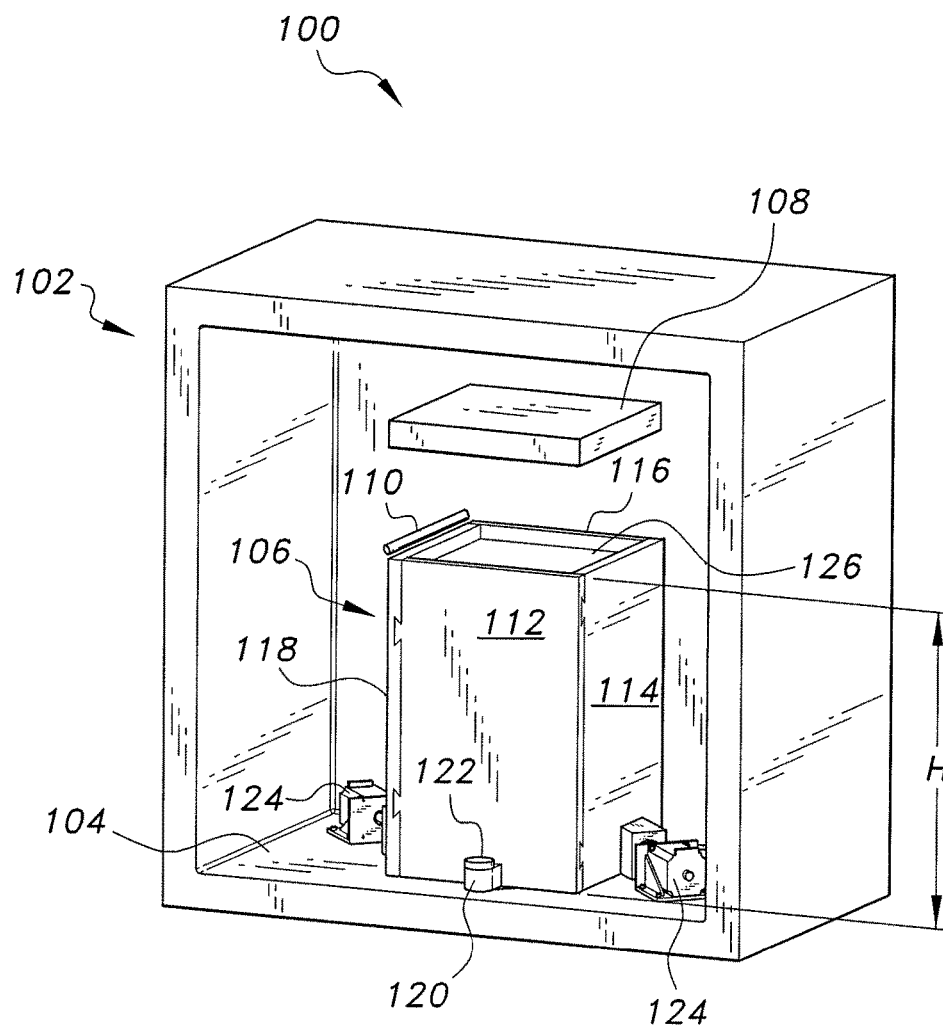


**FIG. 1**

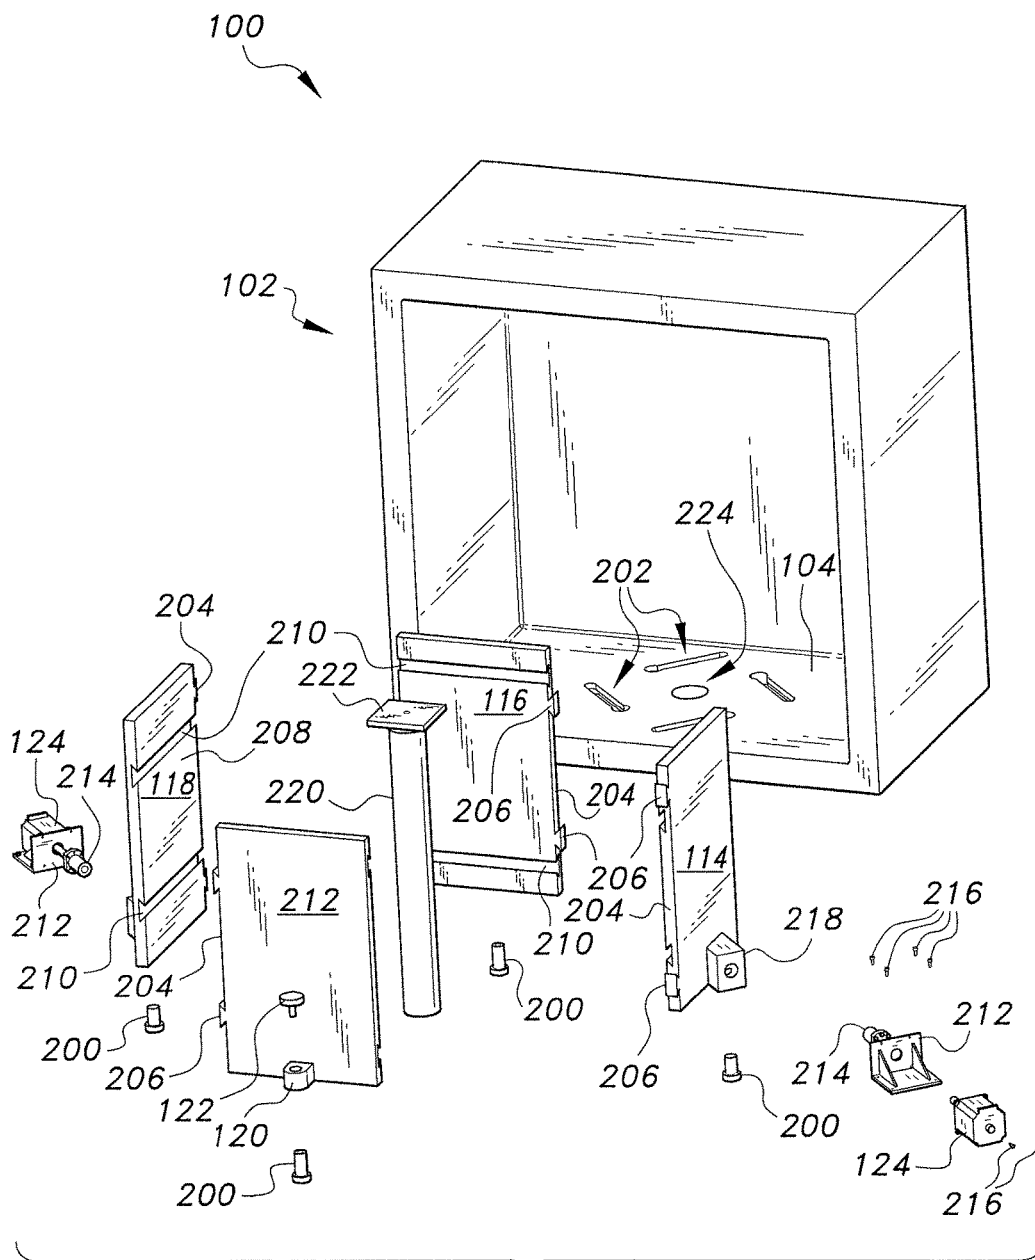

**FIG. 2**

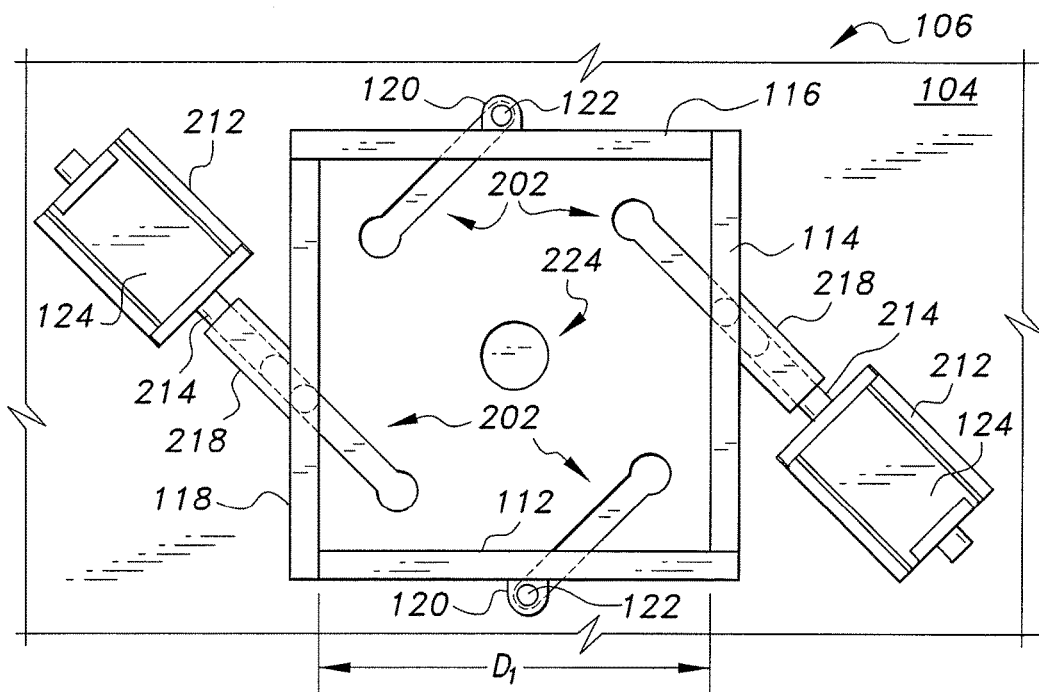

**FIG. 3**

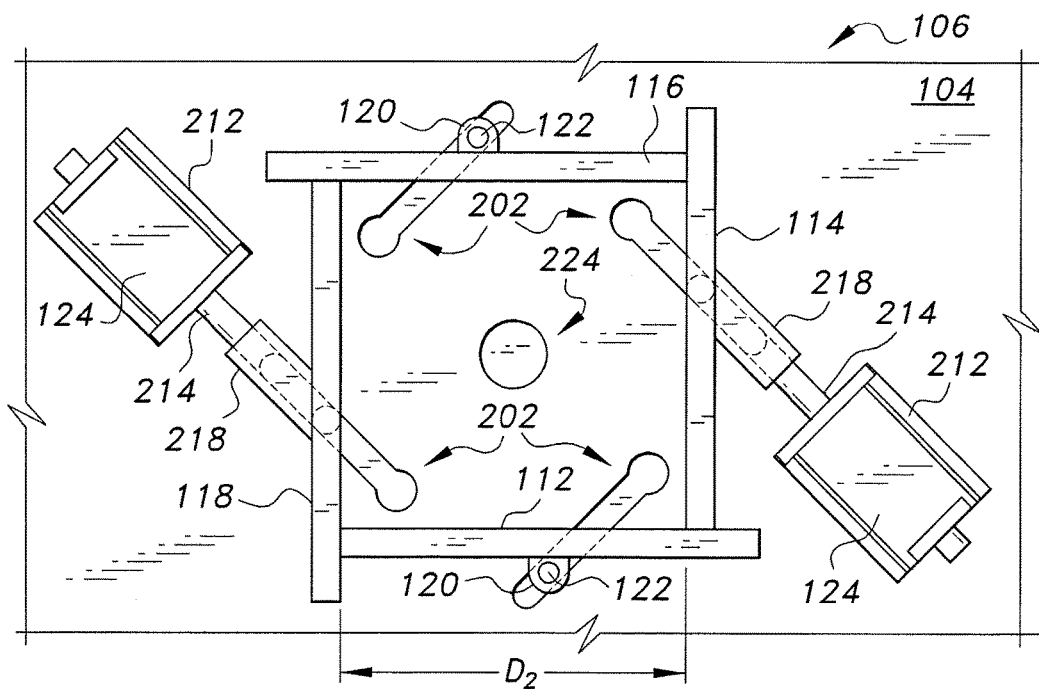

**FIG. 4**

1

## ADJUSTABLE BUILD ENVELOPE FOR POWDER BED FUSION MACHINES

### BACKGROUND

#### 1. Field

The disclosure of the present patent application relates to power bed fusion machines used in additive manufacturing, and particularly to an adjustable build envelope for powder bed fusion machines.

#### 2. Description of the Related Art

The current powder bed fusion (PBF) systems use an energy source to fuse powders together that are contained in a top layer of a fixed build envelope. These energy sources include direct metal laser sintering, (DMLS); electron beam melting (EBM) selective laser sintering (SLS), or selective laser melting, (SLM). As the powders are fused, a bottom plate of the envelope is lowered and more powders are added on top of the fused layer. This continues layer by layer until the complete component(s) are formed. The fixed envelope is appropriate for uniform build sizes with large build platforms residing on a fixed volume of powder bed. In the case of smaller build sizes (x- and y-direction), the build envelope can utilize smaller build platforms, but the same fixed volume of powder bed is used. This causes an unnecessary amount of powder to get exposed, thereby reducing the useful life of the powder. In addition, fixed large envelopes require a large amount of powder, even for smaller builds, leading to high production cost due to the high prices of metal powder.

Thus, an adjustable build envelope for powder bed fusion machines solving the aforementioned problems is desired.

### SUMMARY

The adjustable build envelope for powder bed fusion machines includes a frame in the build chamber having four movable sides, a base and two motors with lead screws. The motors are placed at an angle of 45° with respect to the side of the frame, so that as the motors rotate the lead screws, the two sides of the frame slide in opposite directions. The sides move inward with the help of guide pins and dovetail grooves, thereby reducing the build envelope volume. For large builds, both motors rotate in the reverse direction to increase the build envelope volume. By changing the build envelope volume according to the given build size, powder waste is reduced.

These and other features of the present disclosure will become readily apparent upon further review of the following specification and drawings.

### BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a perspective view of an exemplary build chamber of a powder bed fusion machine having an adjustable build envelope.

FIG. 2 is an exploded perspective view of the build chamber of FIG. 1.

FIG. 3 is a diagrammatic top view of the adjustable build envelope of the machine of FIG. 1, showing the envelope in its largest configuration.

FIG. 4 is a diagrammatic top view of the adjustable build envelope of FIG. 3, showing the envelope in an intermediate configuration.

2

Similar reference characters denote corresponding features consistently throughout the attached drawings.

### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

FIGS. 1-2 show an exemplary build chamber **100** of a powder bed fusion machine having an adjustable build envelope. The chamber **100** is defined by a housing **102** including a base **104** and having a frame **106** defining an adjustable build envelope (the largest external dimensions of the x-, y-, and z-axes within the build space where parts can be fabricated) on the upper surface of the base **104**. For any given build, the powder bed will be located within the frame **106**. Above the frame **106** is an energy source **108** (FIG. 1), that provides energy required for fusing the powders in the top layer of the powder bed. A roller **110** (FIG. 1) is used to compact a new layer of powder, prior to fusion. The frame **106** includes four side walls **112**, **114**, **116** and **118**. Each side wall **112**, **114**, **116** and **118** includes a guide pin bracket **120**. Guide pins **200** extend through the guide pin brackets **120** and through guide slots **202** in the base **103**. Guide pin caps **122** attach to the tops of the guide pins **200** to hold the guide pins **200** in place. One edge **204** of each frame side wall **112**, **114**, **116** and **118** includes two dovetail-shaped projections **206**. The inside surface **208** of each frame side wall **112**, **114**, **116** and **118** includes two dovetail shaped grooves **210**. The two dovetail-shaped projections **206** of each envelope side wall **112**, **114**, **116** and **118** extend into the two dovetail-shaped grooves **210** of the adjacent frame side. In this configuration, the dovetail-shaped projections **206** and the dovetail-shaped grooves **210** maintain the frame side walls **112**, **114**, **116** and **118** orthogonal to one another as they slide relative to each other, as described further below.

The housing **102** further encloses two drive motors **124** that are mounted to the base **104** using corresponding motor mounts **212** and appropriate fasteners **216**. The drive motors **124** drive lead screws **214** within bushings **218** to advance or retract the side walls **112**, **114**, **116** and **118**. As the side walls **112**, **114**, **116** and **118** are advanced or retracted, the guide pins **200** that extend through the guide pin brackets **120** and through guide slots **202** in the base **103**, as well as the dovetail-shaped projections **206** and the dovetail-shaped grooves **210**, maintain the frame side walls **112**, **114**, **116** and **118** orthogonal to one another, while simultaneously increasing or decreasing the volume of the adjustable build envelope defined by the frame **106**, as is described further below. A bottom support post **220** (FIG. 2) supports a bottom plate **126** (FIG. 1) via a flat bracket **222** (FIG. 2). The bottom plate **126** (FIG. 1) that is used is the build platform, and is selected based on the adjusted size of the frame **106**, as is described further below. The bottom support post **220** extends below the base **104** through orifice **224**. The powder bed fusion machine further includes a bottom adjustment mechanism (not shown) below the base **104** for adjusting the height of the bottom plate **126** as additional powder levels are added.

FIG. 3 shows a diagrammatic top view of the frame **106** of FIG. 1, showing the frame **106** in its largest configuration on the x- and y-axes. The top of the housing **102** and the bottom plate **126** have been removed to show the underlying features. In this configuration, the drive motors **124** have retracted the lead screws **214** within bushings **218** to retract the side walls **112**, **114**, **116** and **118** to their maximum volume position. In this position, each effective side of the adjustable powder bed envelope **106** is  $D_1$  in length. Thus the effective volume of the adjustable frame **106** in FIG. 3

3

is its height  $H$  (FIG. 1) times the side length  $D_1$  squared, or  $HD_1^2$ . After adjustment of the dimensions of the frame 106, the bottom plate 126 is placed on the post 220 and powder is loaded on the plate 126, with or without supports or molds, for fusion of the layers to fabricate the part.

FIG. 4 shows a diagrammatic top view of the frame 106 of FIG. 1, showing the frame in an intermediate configuration, between the largest configuration of FIG. 3 and a minimum position (not shown). The top of the housing 102 and the bottom plate 126 have been removed to show the underlying features. In this configuration, the drive motors 124 have advanced the lead screws 214 within bushings 218 to advance the side walls 112, 114, 116 and 118 inward to an intermediate volume position. In this position, each effective side of the adjustable powder bed envelope 106 is  $D_2$  in length, where  $D_2$  is shorter in length than  $D_1$ . Thus, the effective volume of the adjustable build envelope defined by the frame 106 in FIG. 4 is the height  $H$  (FIG. 1) of the frame 106 times the side length  $D_2$  squared, or  $HD_2^2$ . After adjustment of the dimensions of the frame 106, the bottom plate 126 is placed on the post 220 and powder is loaded on the plate 126, with or without supports or molds, for fusion of the layers to fabricate the part.

It is to be understood that the adjustable build envelope for powder bed fusion machines is not limited to the specific embodiments described above, but encompasses any and all embodiments within the scope of the generic language of the following claims enabled by the embodiments described herein, or otherwise shown in the drawings or described above in terms sufficient to enable one of ordinary skill in the art to make and use the claimed subject matter.

We claim:

1. A powder bed fusion machine comprising:

a build chamber; and

an adjustable build envelope, comprising:

a frame adapted for mounting in the build chamber, the frame having four side walls, each of the side walls having an inner face, and outer face, a top edge, a bottom edge, two opposing side edges, and upper and lower dovetail tongues projecting from one or the side edges, the inner face of each of the side walls having upper and lower dovetail grooves defined therein, the

4

dovetail tongues of each of the sidewalls being slidably disposed in the dovetail groove of an adjacent one of the sidewalls defining dovetail joints interlocking the four sidewalls in a rectangular parallelepiped configuration defining the build envelope;

a guide post bracket extending from the outer face of each of the sidewalls adjacent the bottom edge of the respective side wall, each of the brackets being adapted for receiving a guide post extending through the respective bracket and a corresponding guide slot defined in a floor of the build chamber;

a bushing extending from the outer face of two of the side walls disposed parallel to each other, the bushings being mounted adjacent the bottom edge of the respective side walls;

a pair of motor mounts adapted for mounting on the floor of the build chamber;

a motor mounted on each of the motor mounts;

a lead screw extending from each of the motors, each of the lead screw having a first end attached to the motor and a second end extending into a corresponding one of the bushings, the motors and the motor mounts being configured at an angle of  $45^\circ$  relative to the sidewall on which the corresponding bushing is mounted; the lead screws being extendable and retractable when the motors are operated in forward and reverse, respectively, whereby the dovetail tongues slide in the dovetail grooves so that the rectangular parallelepiped expands and contracts to adjust the build envelope, the side walls being constrained to maintain a rectangular parallelepiped configuration by the dovetail joints and sliding action of the guide posts in the guide slots in the floor of the build chamber.

2. The powder bed fusion machine according to claim 1, further comprising:

a bottom support post disposed within the rectangular parallelepiped frame, the post being adapted for extending through the floor of the build chamber and being raised and lowered; and

a bottom plate mounted on the post, the bottom plate defining a build platform for raising the powder bed.

\* \* \* \* \*